

DESCRIPTION




- Enables to control the operation of an electric installation or equipment according to a daily or weekly program.
- It has capacity for memorization of 32 operations.
- Automatic changeover of summer / winter time and possibility of downtime programming.
- Installation in DIN rail track, in Panelboards.

MAXIMUM RECOMMENDED LOAD

	3000 W		600 W/VA
	1200 W/VA		400 W/VA
	2000 W/VA		600 W/VA
	3000 W		


CIRCUIT DIAGRAM



CHARACTERISTICS

- Voltage: 230V~
- Frequency: 50/60Hz
- Breaking capacity: 16(10)A
- Consumption: 1W (aprox.)
- Memory capacity: 32
- Output: ON, OFF and PULSE (1 to 59 sec.)
- Precision: 1 sec./day
- Operating temperature: -10°C - +50°C
- Protection Index: IP20.
- Insulation Class: II
- Power reserve: 4 years.

DIMENSIONS (mm)

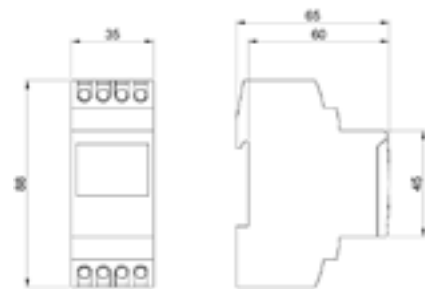

WIRING DIAGRAM

