

**ELECTRONIC STAIRCASE TIME-DELAY SWITCH 16A (REF. 55030)**

**DESCRIPTION**




- Enables to connect and disconnect a lighting installation after a programmed time-delay.
- The activation is made by the use of Push-buttons, Rocker Push-buttons or Rocker Push-buttons with Orienting Light according to the 3 wires diagram.
- Instalation in DIN rail track, in Panelboards.

**OPERATION**




**CIRCUIT DIAGRAM**



**CHARACTERISTICS**

- Voltage: 230V~.
- Consumption: 48mA.
- Frequency: 50/60Hz.
- Time adjustment: 10 seg. - 10 min.
- Output: 1NA - 16A/250V~ 4000VA.
- Cables section: 0,2 - 2,5mm<sup>2</sup>.
- Protection Index: IP20.
- Insulation Class: II.

**DIMENSIONS (mm)**

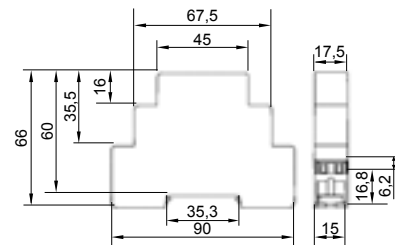

**WIRING DIAGRAMS**

■ With 3 wires.

■ With 4 wires.

